




OK-405 RTR

Roll to Roll Rotary Press



This advanced sublimation machine, the **OK-405 RTR** is designed to accommodate the need for faster transfer speeds by our innovative engineers. The workable widths of 66" 72", 84 and 128" and designed with a pivot system for automatic belt tracking, which ensures no lateral movement and "ghosting" on any of your fabric. The OK-405R encompasses even heat 24" diameter drum to ensure color intensity across even wide fabrics utilizing an advanced technology, well engineered oil filled, steel encased heating drum. A 7" touch screen interface the provides intuitive user control as well as advanced features that allows for savable settings to ensures consistent production

This machine enables owners of machines that are struggling to keep up with the increasing speed of newly available industrial printers for the market. Our machine is able to easily press over 500 feet per hour.

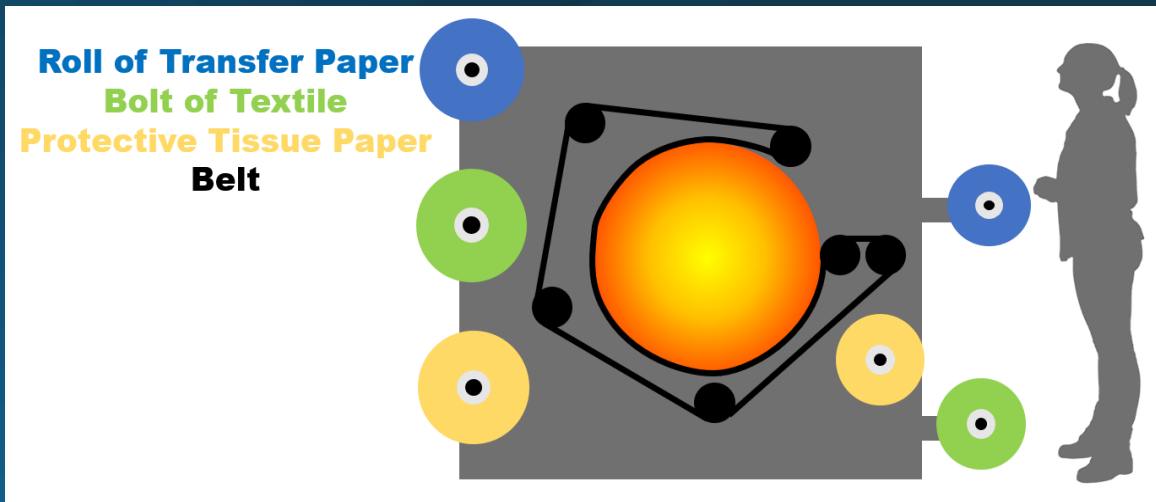

FEATURES . . .

- 7" touch screen interface provides intuitive user control and savable settings ensures consistent production
- A heating assembly enclosed in a roller style 24" diameter drum. This allows minimum hot air to escape from inside the drum, maintaining the printing temperature
- A torsion bar designed to ensure even pressure across the width of the belt, eliminating "bleeding" or "blow through" and allowing for a crisper, cleaner print
- 24" diameter drum is mounted on heavy-duty 7.5-inch roller bearings on shafts for quieter, smoother drum rotation. backdrops and full width carpet
- Optional machine mounting for up to three unwinds with separate slipping clutches and three rewinds with adjustable brake allowing for the use of different sized rolls
- Unwind and rewind stations operated by pneumatic clutches and brakes
- Surface rewinds for stretchy fabric production

. . .

D

- Powered Unwind for Stretchy Fabrics
- Fabrics Surface Rewind
- Exhaust Hood

SPECIFICATIONS . . .

	66"	72"	84"	128"
Belt Width	66"	72"	84"	128"
Drum Diameter	24"	24"	24"	24"
Electrical	31kW 90A 240V 3P	50W 150A 240V 3P	56kW 165A 240V 3P	74kW 225A 240V 3P
Weight	5000 lb	6000 lb	7000 lb	14,000 lb
Air Supply	100 PSI (.75CFM)	100 PSI (.75CFM)	100 PSI (.75CFM)	100 PSI (.75CFM)
Dimensions (WxDxH)	130x50x50	140x50x50	150x50x50	190x50x50